

SILCA MAGAZINE

New Unocode 399 Evo!

NEW



Unocode 399 Evo

Unocode 399 Evo is quicker, quieter, easier to use and extremely reliable. Assures excellent cutting quality of flat cylinder or vehicle keys with single or double sides.

Unocode 399 Evo reads and cuts the key simultaneously (Stand Alone). Introduces clamps with rapid rotating system and torque controlled knob.

Provides maximum running flexibility due to the possibility to create personalised cards on board and also downloading cards created with Code Maker Program.

Enter the Evolution of Silca Electronic Key Machines with Unocode 399 Evo.

www.silca.biz



Silca Unocode 399 Evo



SILCA YOUR GLOBAL PARTNER IN LOCKSMITHING

Less time for key cutting cycles, less time for setting up the machine.

| UNOCODE 399 EVO STAND ALONE | UNOCODE 399 EVO WITH PC | Main Features |
|--------------------------------|----------------------------|--|
| ● | ● | ■ Reading and cutting at the same time; |
| ● | ● | ■ Customised card creation function on board; |
| ● | ● | ■ Very quite while cutting; |
| ● | ● | ■ Quick cutting time cycle; |
| ● | ● | ■ New on board screen with colour graphic display (5,7" / 70x120mm); |
| ● | ● | ■ New user friendly key board; |
| ● | ● | ■ New clamp locking handle with torque control system; |
| ● | ● | ■ Quick release system for jaws rotation; |
| ● | ● | ■ Increased motor speed; |
| ● | ● | ■ Well illuminated working area thanks to led lights; |
| ● | ● | ■ New design cutter guaranteeing high quality cutting results; |
| ● | ● | ■ Code Maker cards downloading and transfer function; |
| ● | ● | ■ 1 USB port and 1 RS232 port connectivity; |
| ● | ● | ■ Automatic Calibration. |

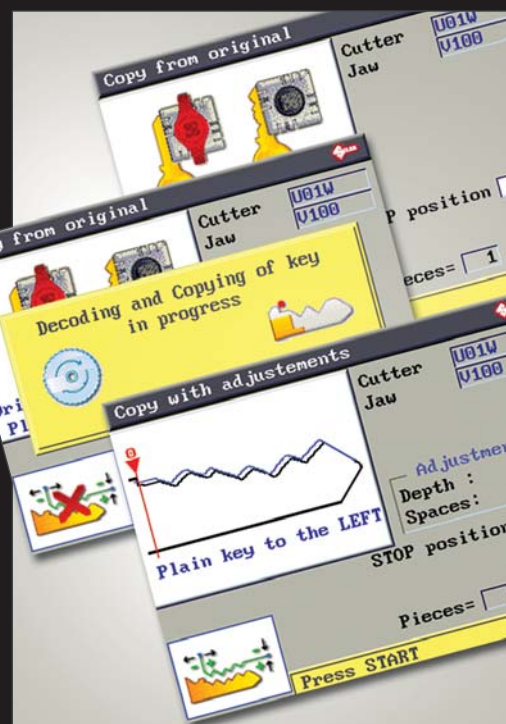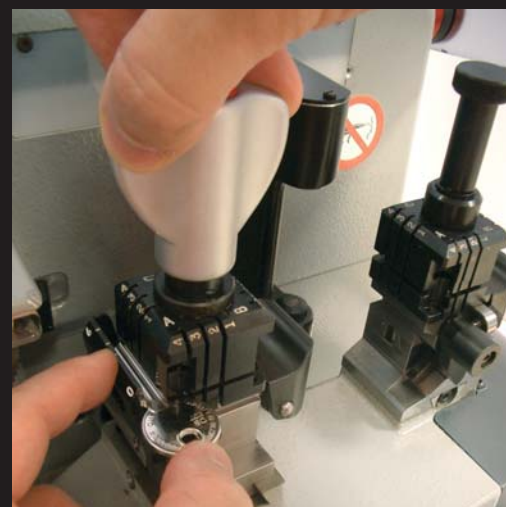

Technical Data

| | |
|---------------------|--|
| Electricity supply: | 230V-50Hz |
| Clamp: | universal 4 sided clamp to grip flat, car and cruciform keys |
| Cutter: | hard metal |
| Tool speed: | 50Hz: 2370 rpm (+/- 10%) |
| Cutter motor: | Monophase, single speed |
| Movements: | on 2 axes with ball screws activated by step motors, on rectified roller guides. Possibility to add a 3rd axis to activate the optional tilting and rotating clamps. |
| Runs: | X axis: 57 mm - Y axis: 32 mm |
| Dimensions: | width: 450 mm - depth: 600 mm height: 440 mm (with raised shield 680 mm) |
| Mass: | Kg. 38 |

SILCA S.p.A. Via Podgora, 20 (Z.I.) - 31029 Vittorio Veneto (TV) - Italy
Telephone +39 0438 9136 Fax +39 0438 913800

www.silca.biz

